



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

U.S. Serial No.: 09/986,055

Filed: November 7, 2001

VERIFICATION OF A TRANSLATION


I, the below named translator, hereby declare that:

My name and post office address are as stated below;

That I am knowledgeable in the Japanese language in which the below identified Japanese application was filed, and that I believe the English translation of the Japanese application No. 339607/2000 is a true and complete translation of the above identified Japanese application as filed.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Date: August 17, 2004

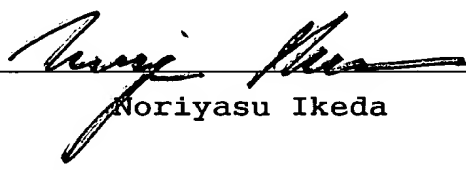Full name of the translator: 

Noriyasu Ikeda

Post Office Address: The 3rd Mori Building  
4-10, Nishishinbashi 1-chome,  
Minato-ku, Tokyo, Japan

(Translation)

PATENT OFFICE  
JAPANESE GOVERNMENT

This is to certify that the annexed is a true copy of the following application as filed with this Office.

Date of Application: The 7th day of November, 2000

Application Number: Patent Application 2000-339607

Applicant(s): NEC Corporation

September 5, 2001

Commissioner,  
Japan Patent Office Kozo Oikawa

Certificate No. P2001-3082082

(Translation)

[Name of Document] Patent Application

[Reference Number] 53400115

[Filing Date] November 7, 2000

[To] Commissioner, Japan Patent Office

[International Class] H04M 11/06

[Inventor]

[Address] c/o NEC Corporation, 7-1, Shiba 5-chome,  
Minato-ku, Tokyo

[Name] Masaaki Morishima

[Applicant]

[ID Number] 000004237

[Name] NEC Corporation

[Attorney]

[ID Number] 100099830

[Patent Attorney]

[Name] Yukuo Nishimura

[Tel] 048-825-8201

[Official Fee]

[Deposit Number] 038106

[Sum] 21,000 yen

[List of Presented Documents]

[Name] Specification 1

[Name] Drawing 1

[Name] Abstract 1

[Registration Number of  
General Power of Attorney] 9407736

[Proof] Required

[Name of Document] SPECIFICATION

[Title of the Invention] MOBILE TERMINAL, DISPLAY  
SWITCHING METHOD OF MOBILE TERMINAL, AND RECORDING  
MEDIUM FOR RECORDING DISPLAY SWITCHING PROGRAM

[Claims]

[Claim 1] A mobile terminal comprising:

display means for displaying characters and an image;  
browser control means for executing first processing  
for displaying first display data having the procedure for  
browsing a desired web page and the content of the web page  
on said display means so that an operator browses the web  
page;

e-mail sending and receiving control means for  
executing second processing for displaying second display  
data having the procedure for creating an e-mail, the  
procedure for sending and receiving the e-mail, and the  
content of the created or received e-mail on said display  
means so as to send and receive the e-mail; and

switching control means for controlling said browser  
control means and said e-mail sending and receiving means in  
accordance with operator's instructions and displaying said  
first display data and said second display data on said  
display means while switching them.

[Claim 2] A mobile terminal according to Claim 1, wherein  
when the e-mail is received or the operator instructs said

second processing while said browser control means executes said first processing, said switching control means controls said browser control means and said e-mail sending and receiving means to display the content of the received e-mail or said second display data on said display means.

[Claim 3] A mobile terminal according to Claim 1, wherein when the e-mail is received or the operator instructs said second processing while said browser control means executes said first processing, said switching control means controls said browser control means and said e-mail sending and receiving means so that said display means displays said first display data and the content of the received e-mail or said second display data on a single screen or separated screens.

[Claim 4] A mobile terminal according to Claim 2 or 3, wherein after the content of the received e-mail is displayed on said display means and a predetermined time passes, said switching control means controls said browser control means and said e-mail sending and receiving means to display only said first display data on said display means.

[Claim 5] A mobile terminal according to any one of Claims 1 to 4, further comprising:

copying means for copying all or a part of said first display data or said second display data displayed on said display means, as all or a part of said second display data

or said first display data which is switched and displayed by said switching control means, in accordance with operator's instructions.

[Claim 6] A mobile terminal according to any one of Claims 1 to 5, wherein said operator's instructions are received as manual operation of an operating portion or operator's voice.

[Claim 7] A display switching method of a mobile terminal, comprising:

a browser control step of executing first processing for displaying first display data having the procedure for browsing a desired web page and the content of the web page on display means so that an operator browses the web page;

an e-mail sending and receiving control step of executing second processing for displaying second display data having the procedure for creating an e-mail, the procedure for sending and receiving the e-mail, and the content of the created or received e-mail on said display means so as to send and receive the e-mail; and

a switching control step of starting or stopping the execution of said browser control step and said e-mail sending and receiving control step in accordance with operator's instructions and displaying said first display data and said second display data on said display means while switching them.

[Claim 8] A display switching method of a mobile terminal according to Claim 7, wherein when the e-mail is received or the operator instructs said second processing while executing said first processing in said browser control step, the execution of said browser control step and said e-mail sending and receiving control step starts or stops in said switching control step to display the content of the received e-mail or said second display data on said display means.

[Claim 9] A display switching method of a mobile terminal according to Claim 7, wherein when the e-mail is received or the operator instructs said second processing while said first processing is executed in said browser control step, the execution of said browser control step and said e-mail sending and receiving step starts or stops in said switching control step so that said display means displays said first display data and the content of the received e-mail or said second display data on a single screen or separated screens.

[Claim 10] A display switching method of a mobile terminal according to Claim 8 or 9, wherein after the content of the received e-mail is displayed on said display means and a predetermined time passes, the execution of said browser control step and said e-mail sending and receiving control step starts or stops in said switching control step to display only said first display data on said display

means.

[Claim 11] A display switching method of a mobile terminal according to any one of Claims 7 to 10, further comprising:

a copying step of copying all or a part of said first display data or said second display data displayed on said display means, as all or a part of said second display data or said first display data which is switched and displayed in said switching control step, in accordance with operator's instructions.

[Claim 12] A display switching method of a mobile terminal according to any one of Claims 7 to 11, wherein said operator's instructions are received as manual operation of an operating portion or operator's voice.

[Claim 13] A recording medium for recording a computer-executable display switching program, wherein said program comprises:

a browser control step of executing first processing for displaying first display data having the procedure for browsing a desired web page and the content of the web page on display means so that an operator browses the web page;

an e-mail sending and receiving control step of executing second processing for displaying second display data having the procedure for creating an e-mail, the procedure for sending and receiving the e-mail, and the



content of the created or received e-mail on said display means so as to send and receive the e-mail; and

a switching control step of starting or stopping the execution of said browser control step and said e-mail sending and receiving control step in accordance with operator's instructions and displaying said first display data and said second display data on said display means while switching them.

[Claim 14] A recording medium for recording a computer-executable display switching program according to Claim 13, wherein when the e-mail is received or the operator instructs said second processing while executing said first processing in said browser control step, the execution of said browser control step and said e-mail sending and receiving control step starts or stops in said switching control step to display the content of the received e-mail or said second display data on said display means.

[Claim 15] A recording medium for recording a computer-executable display switching program according to Claim 14, wherein when the e-mail is received or the operator instructs said second processing while said first processing is executed in said browser control step, the execution of said browser control step and said e-mail sending and receiving step starts or stops in said switching control step so that said display means displays said first display

data and the content of the received e-mail or said second display data on a single screen or separated screens.

[Claim 16] A recording medium for recording a computer-executable display switching program according to Claim 14 or 15, wherein after the content of the received e-mail is displayed on said display means and a predetermined time passes, the execution of said browser control step and said e-mail sending and receiving control step starts or stops in said switching control step to display only said first display data on said display means.

[Claim 17] A recording medium for recording a computer-executable display switching program according to any one of Claims 13 to 16, wherein said program further comprises:

a copying step of copying all or a part of said first display data or said second display data displayed on said display means, as all or a part of said second display data or said first display data which is switched and displayed in said switching control step, in accordance with operator's instructions.

[Claim 18] A recording medium for recording a computer-executable display switching program according to any one of Claims 13 to 17, wherein said operator's instructions are received as manual operation of an operating portion or operator's voice.

[Detailed Description of the Invention]

[0001]

[Technical Field of the Invention]

The present invention relates to a mobile terminal, such as a mobile phone, including data communication functions, e.g., a browser for browsing a web page via the Internet and a mailer for sending and receiving an e-mail, a display switching method for switching a display screen when the browser in the mobile terminal operates and a display screen when the-mailer operates, and a recording medium for recording a display switching program for implementing the display switching method.

[0002]

[Description of the Related Art]

In recent years, the Internet is greatly widespread, and e-mails are frequently used. Radio mobile terminals such as mobile phones have not only an inherent call function but also data communication functions, e.g., a browser for accessing a web page via the Internet and a mailer for sending and receiving an e-mail, thus easily enjoying an Internet access service and an e-mail service anytime and anywhere.

[0003]

Referring to Fig. 13, a conventional mobile phone 101, as the above-mentioned mobile terminal, comprises a display unit 102 having a liquid crystal display device, and an

input unit 103 having a plurality of operational keys. The input unit 103 comprises a browser mode selecting key 103a for starting a browser and browsing a web page, an e-mail mode selecting key 103b for sending and receiving an e-mail, a communication mode selecting key 103c for communication, a browser mode clear key 103d for returning to a standby screen for a browser screen, an e-mail mode clear key 103e for returning to a standby mode screen from an e-mail screen, a power key 103f, a ten-key 103g for inputting numbers, and a cursor key 103h for moving a cursor in the vertical and horizontal directions on the display screen.

[0004]

A description is given of operations of the conventional mobile phone 101 with reference to Fig. 14.

First, power is turned on (step ST101 in Fig. 16). A control unit (not shown) in the mobile phone 101 enters the standby mode of operator's input operation and reception of the e-mail, and the display unit 102 displays a predetermined standby screen (step ST102).

In the above-mentioned state, the operator presses the e-mail mode selecting key 103b (step ST103). The control unit enters an e-mail mode, and the display unit 102 displays an e-mail screen as shown in Fig. 15 (step ST104). On a menu selecting screen (in Fig. 15(a)), the operator selects, for example, "create e-mail". Then, as shown in

Figs. 15(b) and 15(c), an e-mail creating screen is displayed and, when the operator as a secretary for an alumni association sends information to members, he inputs the addresses of the members, and creates and sends the text of information.

[0005]

In the e-mail mode, an e-mail mode clear key 103e is pressed (step ST105). Then, the control unit returns to the standby mode and the display unit 102 displays the standby screen. When the e-mail mode clear key 103e is not pressed, the display unit 102 continuously displays the e-mail mode screen.

When the browser mode selecting key 103a is pressed in the standby mode (step ST106), the control unit shifts to the browser mode in which the display unit 102 displays the browser screen as shown in Fig. 16 (step ST107). When the operator selects, for example, "Internet" on the menu selecting screen (in Fig. 16(a)), the display unit 102 displays a URL (Uniform Resource Locator) input screen for inputting a URL to specify a unique resource on the Internet, as shown in Fig. 16(b). The operator inputs a predetermined URL, accesses a desired web page of a restaurant to be used as a party place of the alumni association, the content of the web page displayed on the display unit 102 is browsed as shown in Fig. 16(c).

[0006]

When the browser mode clear key 103d is pressed in the browser mode, the control unit returns to the standby mode in which the display unit 102 displays the standby screen. When the browser mode clear key 103d is not pressed, the display unit 102 continuously displays the screen of the browser mode.

When neither the browser mode selecting key 103a nor the e-mail mode selecting key 103b is pressed and power is not turned off (step ST109), the standby mode continues and the standby screen is displayed.

[0007]

[Problems to be Solved by the Invention]

When the operator desires to switch the screen from the browser mode to the e-mail mode, the browser mode clear key 103d needs to be pressed once, thus returning to the standby mode. After that, the e-mail mode selecting key 103b needs to be pressed. Therefore, there is a problem in that the number of times for operating the keys is large and the switching operation takes a long time.

If the web page of the restaurant, as the party place pf the alumni association, is accessed and the location, the telephone number, service contents, etc. are checked in the browser mode, after that, the information on the opening of the alumni association is sent to the members via the e-mail,

the browser mode clear key 103d and the e-mail mode selecting key 103b are pressed. Further, when it is necessary to operate the keys displayed on the screen and the cursor key 103h, as shown in Fig. 15, the information can be inputted by performing the above operations, excluding the operation for inputting characters, at least four times.

[0008]

In particular, thereafter, when the content of the web page (the telephone number, etc.) is checked once again, the e-mail mode clear key 103e needs to be pressed. Further, it is necessary to press the browser mode selecting key 103a, the keys displayed on the screen, the cursor key 103h, or the like, and input characters again, as shown in Fig. 16.

Accordingly, there is a problem in that the operation of keys is complicated and the operability is inferior.

[0009]

The present invention is made under the above circumstances, and it is an object of the present invention to provide a mobile terminal for easily switching a browser mode and an e-mail mode with the number of times for operating keys, a display switching method in the mobile terminal, and a recording medium for recording a display switching program.

[0010]

[Means for Solving the Problems]

To solve the above-mentioned problems, in the invention according to Claim 1, there is provided a mobile terminal comprising display means for displaying characters and an image, browser control means for executing first processing for displaying first display data having the procedure for browsing a desired web page and the content of the web page on the display means so that an operator browses the web page, e-mail sending and receiving means for executing second processing for displaying second display data having the procedure for creating an e-mail, the procedure for sending and receiving the e-mail, and the content of the created or received e-mail on the display means so as to send and receive the e-mail, and switching control means for controlling the browser control means and the e-mail sending and receiving means in accordance with operator's instructions and displaying the first display data and the second display data on the display means while switching them.

[0011]

The invention according to Claim 2 relates to the mobile terminal according to Claim 1, when the e-mail is received or the operator instructs the second processing while the browser control means executes the first processing, the switching control means may control the



browser control means and the e-mail sending and receiving means to display the content of the received e-mail or the second display data on the display means.

[0012]

The invention according to Claim 3 relates to the mobile terminal according to Claim 1, when the e-mail is received or the operator instructs the second processing while the browser control means executes the first processing, the switching control means may control the browser control means and the e-mail sending and receiving means so that the display means displays the first display data and the content of the received e-mail or the second display data on a single screen or separated screens.

[0013]

The invention according to Claim 4 relates to the mobile terminal according to Claim 2 or 3, after the content of the received e-mail is displayed on the display means and a predetermined time passes, the switching control means may control the browser control means and the e-mail sending and receiving means to display only the first display data on the display means.

[0014]

The invention according to Claim 5 relates to the mobile terminal according to any one of Claims 1 to 4, the mobile terminal may further comprise copying means for

copying all or a part of the first display data or the second display data displayed on the display means, as all or a part of the second display data or the first display data which is switched and displayed by the switching control means, in accordance with operator's instructions.

[0015]

The invention according to Claim 6 relates to the mobile terminal according to any one of Claims 1 to 5, the operator's instructions may be received as manual operation of an operating portion or operator's voice.

[0016]

In the invention according to Claim 7, there is provided a display switching method of a mobile terminal, comprising a browser control step of executing first processing for displaying first display data having the procedure for browsing a desired web page and the content of the web page on display means so that an operator browses the web page, an e-mail sending and receiving control step of executing second processing for displaying second display data having the procedure for creating an e-mail, the procedure for sending and receiving the e-mail, and the content of the created or received e-mail on the display means so as to send and receive the e-mail, and a switching control step of starting or stopping the execution of the browser control step and the e-mail sending and receiving

control step in accordance with operator's instructions and displaying the first display data and the second display data on the display means while switching them.

[0017]

The invention according to Claim 8 relates to the display switching method according to Claim 7, when the e-mail is received or the operator instructs the second processing while executing the first processing in the browser control step, the execution of the browser control step and the e-mail sending and receiving control step may start or stop in the switching control step to display the content of the received e-mail or the second display data on the display means.

[0018]

The invention according to Claim 9 relates to the display switching method according to Claim 7, when the e-mail is received or the operator instructs the second processing while the first processing is executed in the browser control step, the execution of the browser control step and the e-mail sending and receiving step may start or stop in the switching control step so that the display means displays the first display data and the content of the received e-mail or the second display data on a single screen or separated screens.

[0019]

The invention according to Claim 10 relates to the display switching method according to Claim 8 or 9, after the content of the received e-mail is displayed on the display means and a predetermined time passes, the execution of the browser control step and the e-mail sending and receiving control step may start or stop in the switching control step to display only the first display data on the display means.

[0020]

The invention according to Claim 11 relates to the display switching method according to any one of Claims 7 to 10, a display switching method of a mobile terminal may further comprise a copying step of copying all or a part of the first display data or the second display data displayed on the display means, as all or a part of the second display data or the first display data which is switched and displayed in the switching control step, in accordance with operator's instructions.

[0021]

The invention according to Claim 12 relates to the display switching method according to any one of Claims 7 to 11, the operator's instructions may be received as manual operation of an operating portion or operator's voice.

[0022]

According to the invention of Claim 13, there is

provided a recording medium for recording a computer-executable display switching program, wherein the program comprises a browser control step of executing first processing for displaying first display data having the procedure for browsing a desired web page and the content of the web page on display means so that an operator browses the web page, an e-mail sending and receiving control step of executing second processing for displaying second display data having the procedure for creating an e-mail, the procedure for sending and receiving the e-mail, and the content of the created or received e-mail on the display means so as to send and receive the e-mail, and a switching control step of starting or stopping the execution of the browser control step and the e-mail sending and receiving control step in accordance with operator's instructions and displaying the first display data and the second display data on the display means while switching them.

[0023]

The invention according to Claim 14 relates to the recording medium for recording the display switching program according to Claim 13, when the e-mail is received or the operator instructs the second processing while executing the first processing in the browser control step, the execution of the browser control step and the e-mail sending and receiving control step may start or stop in the switching

control step to display the content of the received e-mail or the second display data on the display means.

[0024]

The invention according to Claim 15 relates to the recording medium for recording the display switching program according to Claim 14, when the e-mail is received or the operator instructs the second processing while the first processing is executed in the browser control step, the execution of the browser control step and the e-mail sending and receiving step may start or stop in the switching control step so that the display means displays the first display data and the content of the received e-mail or the second display data on a single screen or separated screens.

[0025]

The invention according to Claim 16 relates to the recording medium for recording the display switching program according to Claim 14 or 15, after the content of the received e-mail is displayed on the display means and a predetermined time passes, the execution of the browser control step and the e-mail sending and receiving control step may start or stop in the switching control step to display only the first display data on the display means.

[0026]

The invention according to Claim 17 relates to the recording medium for recording the display switching program

according to any one of Claims 13 to 16, the program may further comprise a copying step of copying all or a part of the first display data or the second display data displayed on the display means, as all or a part of the second display data or the first display data which is switched and displayed in the switching control step, in accordance with operator's instructions.

[0027]

The invention according to Claim 18 relates to the recording medium for recording the display switching program according to any one of Claims 13 to 17, the operator's instructions may be received as manual operation of an operating portion or operator's voice.

[0028]

#### [Description of the Embodiments]

Hereinbelow, a description is given of first to third embodiments of the present invention with reference to the drawings.

#### First embodiment

Fig. 1 is a perspective view showing the structure of a mobile phone according to the first embodiment of the present invention, Fig. 2 is a block diagram showing the structure of the mobile phone, Fig. 3 is a flowchart for explaining operations of the mobile phone, and Figs. 4 to 6 are diagrams showing display examples of a display unit in

the mobile phone.

According to the first embodiment, a mobile phone (mobile terminal) 1 has not only an inherent call function but also function for data communication function through packet switching, which is capable of accessing the Internet, browsing a web page, and sending and receiving an e-mail. Referring to Figs. 1 and 2, the mobile phone 1 comprises a control unit 2 for controlling components of a main body thereof, a storing unit 3 for storing various data and processing programs executed by the control unit 2, an antenna 4 for transmitting and receiving radio, a radio communication unit 5 for transmitting voice and data by modulating them through the antenna 4 as radio and performing call and data communication in accordance with a predetermined protocol by receiving and demodulating the radio as the voice and the data through the antenna 4, an input unit (operating unit) 6 comprising operational keys, a display unit (display means) 7 having a liquid crystal display device, a microphone 8 for inputting voice, a speaker 9 for outputting voice, and a reception indication lamp 11 for indicating the reception by light-on.

[0029]

The control unit 2 is used as a browser controller, an e-mail sending and receiving controller, and a switching controller, and executes processing programs stored in the



storing unit 3, such as a browser as a program for browsing a web page, a mailer as a program for creating, sending, and receiving an e-mail, and a switching control program for switching a browser screen and an e-mail screen. Further, the control unit 2 controls the components by using registers and flags stored in the storing unit 3, thus issuing instructions for transmitting information, managing information, and the like.

The control unit 2 also controls the components in accordance with the operator's key operation via the input unit 6 in a browser mode for browsing the web page, in an e-mail mode for creating, sending, and receiving the e-mail, and in a call mode for phone.

[0030]

The storing unit 3 comprises semiconductor memories such as a ROM and a RAM, stores processing programs, such as the browser and the-mailer which are executed by the control unit 2 and the switching control program for switching the browser mode screen and the e-mail mode screen, and information such as received information, and further stores registers and flags which are used when the control unit 2 executes the above programs.

As shown in Figs. 1 and 2, the input unit 6 comprises a browser mode selecting key 6a for browsing the web page by starting the browser, an e-mail mode selecting key 6b for

creating, sending, and receiving the e-mail, a call mode selecting key 6c for voice call, a mode switching key 6d for switching the browser mode and the e-mail mode, a browser mode clear key 6e for shifting to the standby mode of the operation and the reception from the browser mode and displaying the standby screen, an e-mail mode clear key 6f for shifting to the standby mode of the operation and the reception from the e-mail mode and displaying the standby screen, a power key 6g, a ten-key 6h for inputting numbers, and a cursor key 6i for moving the cursor in the vertical and horizontal directions on a display screen of the display unit 7.

[0031]

Operations of the mobile phone 1 will be described according to the first embodiment with reference to Figs. 4 to 6.

First, power is turned on (step ST11 in Fig. 5), then, the control unit 2 enters the standby mode of operator's input operation and reception. For example, referring to Fig. 4, the display unit 7 displays the standby screen as shown in Fig. 4 (step ST12).

[0032]

The operator, as a secretary of an alumni association, presses the e-mail mode selecting key 6b to send information to members via the e-mail in the standby mode (step ST13).

The control unit 2 shifts to the e-mail mode in which the display unit 7 displays a menu selecting screen as shown in Fig. 5 (step ST14).

[0033]

The operator presses the mode switching key 6d to browse the web page of a restaurant as the party place of the alumni association so as to check the detailed content of the alumni association during creating the information (step ST15). The control unit 2 shifts to the browser mode in which the display unit 7 displays the menu selecting screen as shown in Fig. 6 (step ST16). If the mode switching key 6d is not pressed and the e-mail mode clear key 6f is pressed (step ST17), the control unit 2 returns to the standby mode in which the display unit 7 displays the standby screen as shown in Fig. 4.

If the neither the mode switching key 6d nor the e-mail mode clear key 6f is pressed, the e-mail screen is continuously displayed.

[0034]

In step ST16, the browser screen is displayed and the operator checks the content of the web page and thereafter presses the mode switching key 6d (step ST19) whereupon the processing routine returns to step ST14 and the control unit 2 is switched to the e-mail mode in which the display unit 7 displays the information during creation thereof. After

that, the operator continuously creates the information and sends the e-mail.

When the operator desires to check the content of the web page again to include the telephone number and the location of the party place in the information during creating the information, he views the browser screen at the previous switching time by pressing the mode switching key 6d again.

When the operator presses the browser mode clear key 6e without pressing the mode switching key 6d in step ST20, the processing routine proceeds to step ST21. If the power is not turned off in step ST21, the control unit 2 returns to the standby mode in which the standby screen is displayed as shown in Fig. 4.

[0035]

When the e-mail mode selecting key 6d is not pressed in step ST13 and the browser mode selecting key 6a is pressed in step ST18, the control unit 2 shifts to the browser mode in which the display unit 7 displays the menu selecting screen as shown in Fig. 6 (step ST16).

When the neither mode switching key 6d nor the browser mode clear key 6e is pressed in steps ST13 and ST18, the processing routine returns to step ST16 whereupon the browser screen is continuously displayed.

When the e-mail mode selecting key 6d is not pressed in

step ST13 and the browser mode selecting key 6a is not pressed in step ST18, the processing routine advances to step ST21. If power is not turned off in step ST21, the control unit 2 is continuously in the standby mode and the standby screen is displayed.

[0036]

In the configuration, the e-mail mode can easily be switched from the browser mode by pressing the mode switching key 6d.

Since the screen is returned to the screen interrupted at the previous time by pressing the mode switching key 6d again, it is unnecessary to restart the operation from the standby screen and the number of times for operating the operational keys can be reduced.

[0037]

That is, according to the conventional art, the display screen switches to the screen for inputting the information shown in Fig. 16(c) from the screen shown in Fig. 15(c) by operating keys at least four times. On the other hand, if the information is created in the e-mail mode before shifting to the browser mode, the mode switching key 6d is pressed only once.

In particular, the input operation can be performed by alternately checking the content of the browser screen and the content of the e-mail screen. Therefore, the operations

for creating the e-mail can easily and certainly be executed.

[0038]

#### Second embodiment

Fig. 7 is a flowchart for explaining operations of a mobile phone according to a second embodiment of the present invention, and Fig. 8 is a diagram showing a display example of a display unit in the mobile phone.

According to the second embodiment, differently from the first embodiment, when there is a reception of the e-mail, interrupt processing is performed. Except for this point, the configuration according to the second embodiment is substantially similar to that of the first embodiment and the description is omitted.

[0039]

Next, a description is given of operations of the mobile phone according to the second embodiment.

When the mode switching key 6d is pressed in step ST15 or the browser mode selecting key 6a is pressed in step ST18, the control unit 2 shifts to the browser mode in which the display unit 7 displays the menu selecting screen as shown in Fig. 6 (step ST16).

If the e-mail is received in the browser mode (step ST31), the control unit 2 automatically shifts to the e-mail mode in which the display unit 7 displays an e-mail interrupt screen to overwrite content data on a part of the

browser screen (step ST32), as shown in Fig. 8. The operator selects a folder in which an unread e-mail is stored and reads the text of the stored e-mail.

Thereafter, the e-mail mode clear key 6f is pressed (step ST33), the processing routine proceeds to step ST20. If the e-mail mode clear key 6f is not pressed (step ST33), the e-mail interrupt screen is continuously displayed.

[0040]

If the e-mail is not received in step ST31, the mode switching key 6d is pressed (step ST19), the control unit 2 is switched to the e-mail mode. Then, the processing routine advances to step ST32 whereupon the e-mail interrupt screen is displayed.

If the mode switching key 6d is not pressed in step ST19, the processing routine advances to step ST20.

[0041]

If the browser mode clear key 6e is pressed in step ST20, the processing routine advances to step ST21. If power is not turned off in step ST21, the control unit 2 returns to the standby mode in which the display unit 7 displays the standby screen as shown in Fig. 4. If neither the mode switching key 6d nor the browser mode clear key 6e is pressed, the processing routine returns to step ST16 whereupon the browser mode screen is continuously displayed.

If the e-mail mode selecting key 6b is not pressed in

step ST13 and the browser mode selecting key 6a is not pressed in step ST18, the processing routine progresses to step ST21. If power is not turned off in step ST21, the standby mode continues and the standby screen is displayed.

[0042]

In the configuration, it is possible to obtain the advantage which is substantially similar to that of the first embodiment.

In addition, when the e-mail is received, the processing in the browser mode is interrupted and the operator promptly checks the received e-mail and reads it. Therefore, the miss of an urgent message can be prevented. After checking the e-mail, the interrupted processing in the browser mode can continue and, therefore, the operability can be improved.

[0043]

#### Third embodiment

Figs. 9 and 10 are diagrams showing display examples of a display unit in a mobile phone according to a third embodiment of the present invention.

According to the third embodiment, differently from the first embodiment, the mobile phone has a function for copying a part of the content on the browser screen at a predetermined portion on the e-mail screen, after switching the mode.



Excluding the foregoing, the configuration according to the third embodiment is substantially the same as that of the first embodiment and the description is omitted.

[0044]

The control unit 2 is used as copying means, besides the e-mail sending and receiving controller and the switching controller. Under the control of the control unit 2, the copy content is specified on the browser screen by using the cursor key 6i, etc. and is temporarily stored in the storing unit 3. The operator presses the mode switching key 6d, thus shifting to the e-mail mode. The copy content is displayed at the copy destination specified on the e-mail screen.

[0045]

Next, a description is given of operations of the mobile phone according to the third embodiment.

Under the control of the control unit 2, the e-mail screen is displayed in step ST14. The operator presses the mode switching key 6d during creating the information of the alumni association on the e-mail screen in step ST15, and then, the control unit 2 shifts to the browser mode. In accordance with the operator's key operation, the control unit 2 accesses the web page of the restaurant, thereby displaying the browser screen as shown in Fig. 9.

[0046]

When the operator copies the telephone number to the information on the e-mail screen, a "copy" key 71 is pressed on the e-mail screen by using the cursor key 6i, thus inputting the instructions for copy. Thereafter, a display area of the telephone number is specified on the browser screen by using the cursor key 6i and the display area specified is determined by using a "select" key 72.

In step ST19, the operator presses the mode switching key 6d again and the control unit 2 shifts to the e-mail mode in which the display unit 7 displays the interrupted e-mail screen as shown in Fig. 10.

The operator specifies the position of copy destination of the telephone number on the e-mail screen by using the cursor key 6i and the instructions are inputted by using the "select" key 72, thus copying the telephone number.

[0047]

In the configuration of the third embodiment, it is possible to obtain the advantage which is substantially the same as that of the first embodiment.

Since the contents of the browser screen and the content of the e-mail are alternately checked and the content of either one can be copied when necessary. The text can easily and accurately be created for a short time.

[0048]

Although the first to third embodiments of the present

invention are described in detail with reference to the drawings, the specific configuration is not limited to the embodiments and the present invention is intended to cover various modifications included within the spirit and scope of the present invention.

For example, the browser mode clear key 6e and the e-mail mode clear key 6f are provided in the first embodiment. However, they may be shared, and thus, the number of keys can be reduced.

When the e-mail mode selecting key 6b is pressed in the browser mode, the control unit 2 may shift to the e-mail mode. Accordingly, the dedicated mode switching key 6d can be omitted.

[0049]

Although the case in which the content is overwritten on the e-mail screen upon reception is described according to the second embodiment, the e-mail screen may be separated into up and down portions as shown in Fig. 11. In addition to the screen separation into the up and down portions, the e-mail screen may be separated into right and left portions as shown in Fig. 12. Accordingly, the content of the browser mode screen can easily be checked.

If a predetermined time passes after the e-mail is received and the interrupt screen is displayed according to the second embodiment, the control unit may automatically be

switched to the browser mode. Accordingly, the operator can preferentially perform the processing in the browser mode with the reduced number of key operations.

In addition to the key operations, the operation may be instructed through voice. Accordingly, further, the operability can be improved.

The operator may use not only the mobile phone but also a personal handy phone system (PHS) and a personal digital assistant (PDA) having a radio communication function, as a radio portable terminal. In this case, it is advantageous similarly with the case of the mobile phone.

[0050]

#### [Advantages]

As mentioned above, in the present invention, for example, the screen displaying first display data can easily be switched to the screen displaying the second display data. Therefore, the number of operations of the operational switch can be reduced and the operability can be improved.

Data can be inputted while alternately checking the content of the first display data and the content of the second display data. Therefore, the operation can certainly be performed for a short time.

[0051]

When the e-mail is received during executing the first processing, the switching controller interrupts the first

processing and the display unit displays the content of the e-mail. Thus, the operator can promptly check the content of the e-mail received and the miss of an urgent message can be prevented.

For instance, the copying means copies one of the contents of the first display data and the second display data while alternately checking the contents of both of them when necessary. Accordingly, the text or the like can precisely and easily be created for a short time.

[Brief Description of the Drawings]

[Fig. 1]

Fig. 1 is a perspective view showing the structure of a mobile phone according to a first embodiment of the present invention.

[Fig. 2]

Fig. 2 is a block diagram showing the electric structure of the mobile phone.

[Fig. 3]

Fig. 3 is a flowchart for explaining operations of the mobile phone.

[Fig. 4]

Fig. 4 is a diagram showing one display example of a display unit in the mobile phone.

[Fig. 5]

Fig. 5 is a diagram showing another display example of

the display unit in the mobile phone.

[Fig. 6]

Fig. 6 is a diagram showing another display example of the display unit in the mobile phone.

[Fig. 7]

Fig. 7 is a flowchart for explaining operations of a mobile phone according to a second embodiment of the present invention.

[Fig. 8]

Fig. 8 is a diagram showing a display example of a display unit in the mobile phone.

[Fig. 9]

Fig. 9 is a diagram showing one display example of a display unit in a mobile phone according to a third embodiment of the present invention.

[Fig. 10]

Fig. 10 is a diagram showing another display example of the display unit.

[Fig. 11]

Fig. 11 is a diagram showing a display example of a display unit in a mobile phone in one modification of the second embodiment of the present invention.

[Fig. 12]

Fig. 12 is a diagram showing a display example of a display unit in a mobile phone in another modification of

the second embodiment of the present invention.

[Fig. 13]

Fig. 13 is a diagram for illustrating a conventional art.

[Fig. 14]

Fig. 14 is a flowchart for illustrating the conventional art.

[Fig. 15]

Fig. 15 is a diagram for illustrating the conventional art.

[Fig. 16]

Fig. 16 is a diagram for illustrating the conventional art.

[Reference Numerals]

1: mobile phone (mobile terminal)

2: control unit (browser control means, e-mail sending and receiving control means, switching control means, and copying means)

3: storing unit

6: input unit (operating unit)

7: display unit (display means)

[Name of Document]        ABSTRACT

[Abstract]

[Object]    To switch a browser mode and an e-mail mode by the number of times for operating keys.

[Solving Means]    In a standby mode, an operator presses an e-mail mode selecting key 6b, thereby shifting to an e-mail mode. A control unit 2 enables a display unit 7 to display a menu selecting screen of an e-mail and the operator thereafter creates the e-mail while viewing a display screen. The operator presses a mode switching key 6d to refer to the content of a predetermined homepage, thereby shifting to a browser mode. The control unit 2 enables the display unit 7 to display a menu selecting screen of a browser and the operator browses the homepage after inputting a corresponding URL. The operator presses the mode switching key 6d in the browser mode, thereby shifting to the e-mail mode in which the screen is returned to that for creating the e-mail. The operator continuously creates the e-mail.

[Selected Figure]        Fig. 1



[Name of Document]

DRAWING

Fig. 1

1; MOBILE PHONE

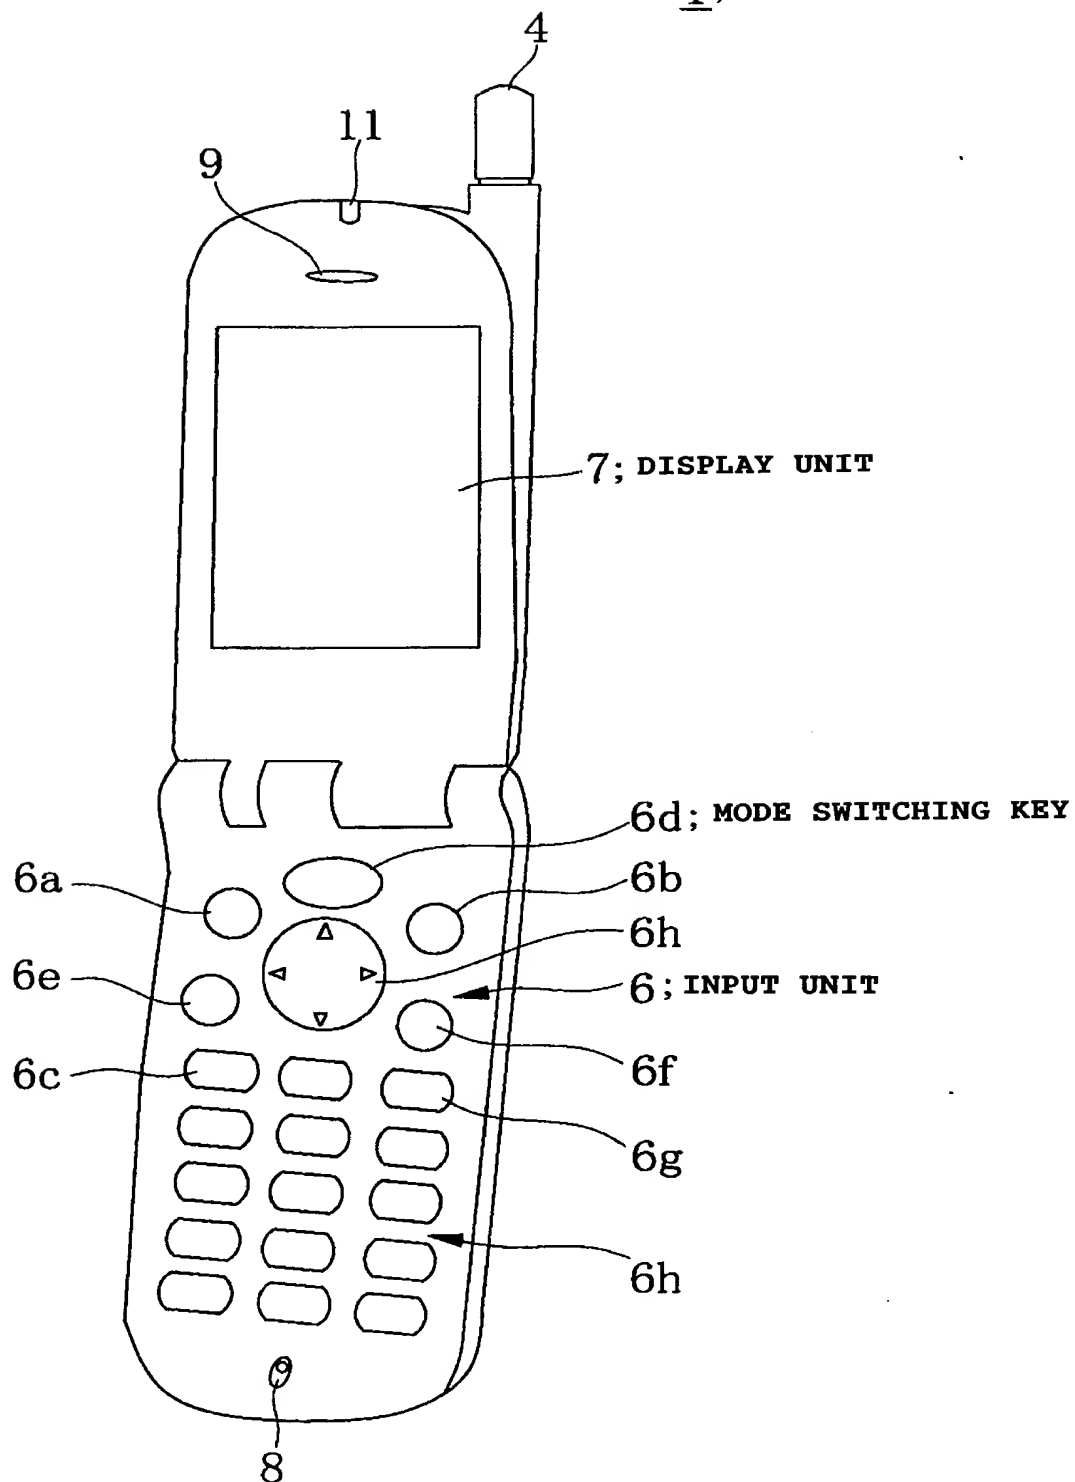


Fig. 2

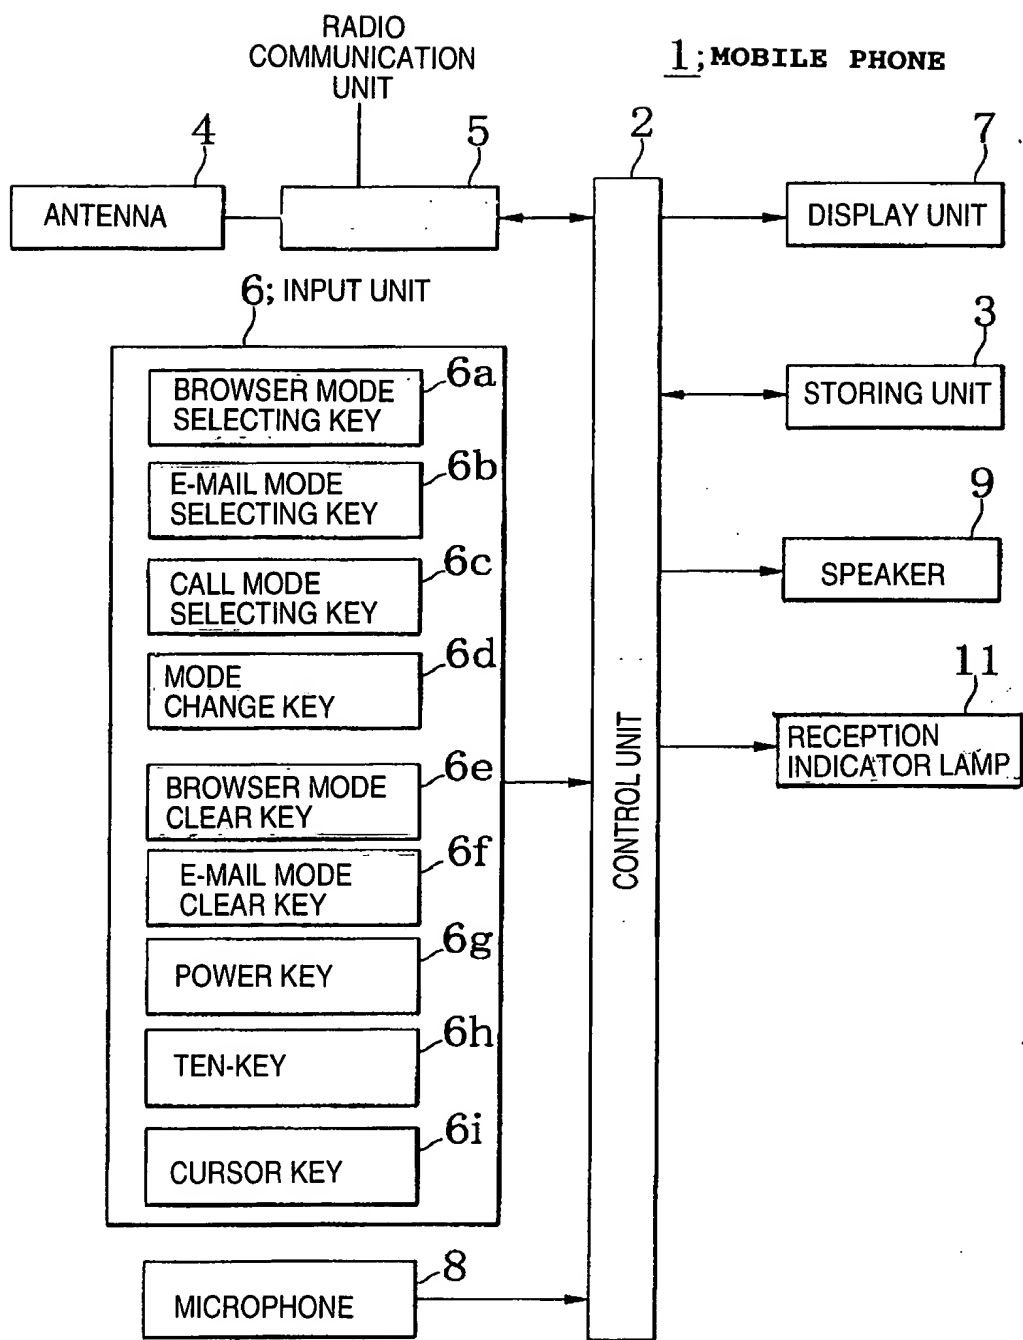
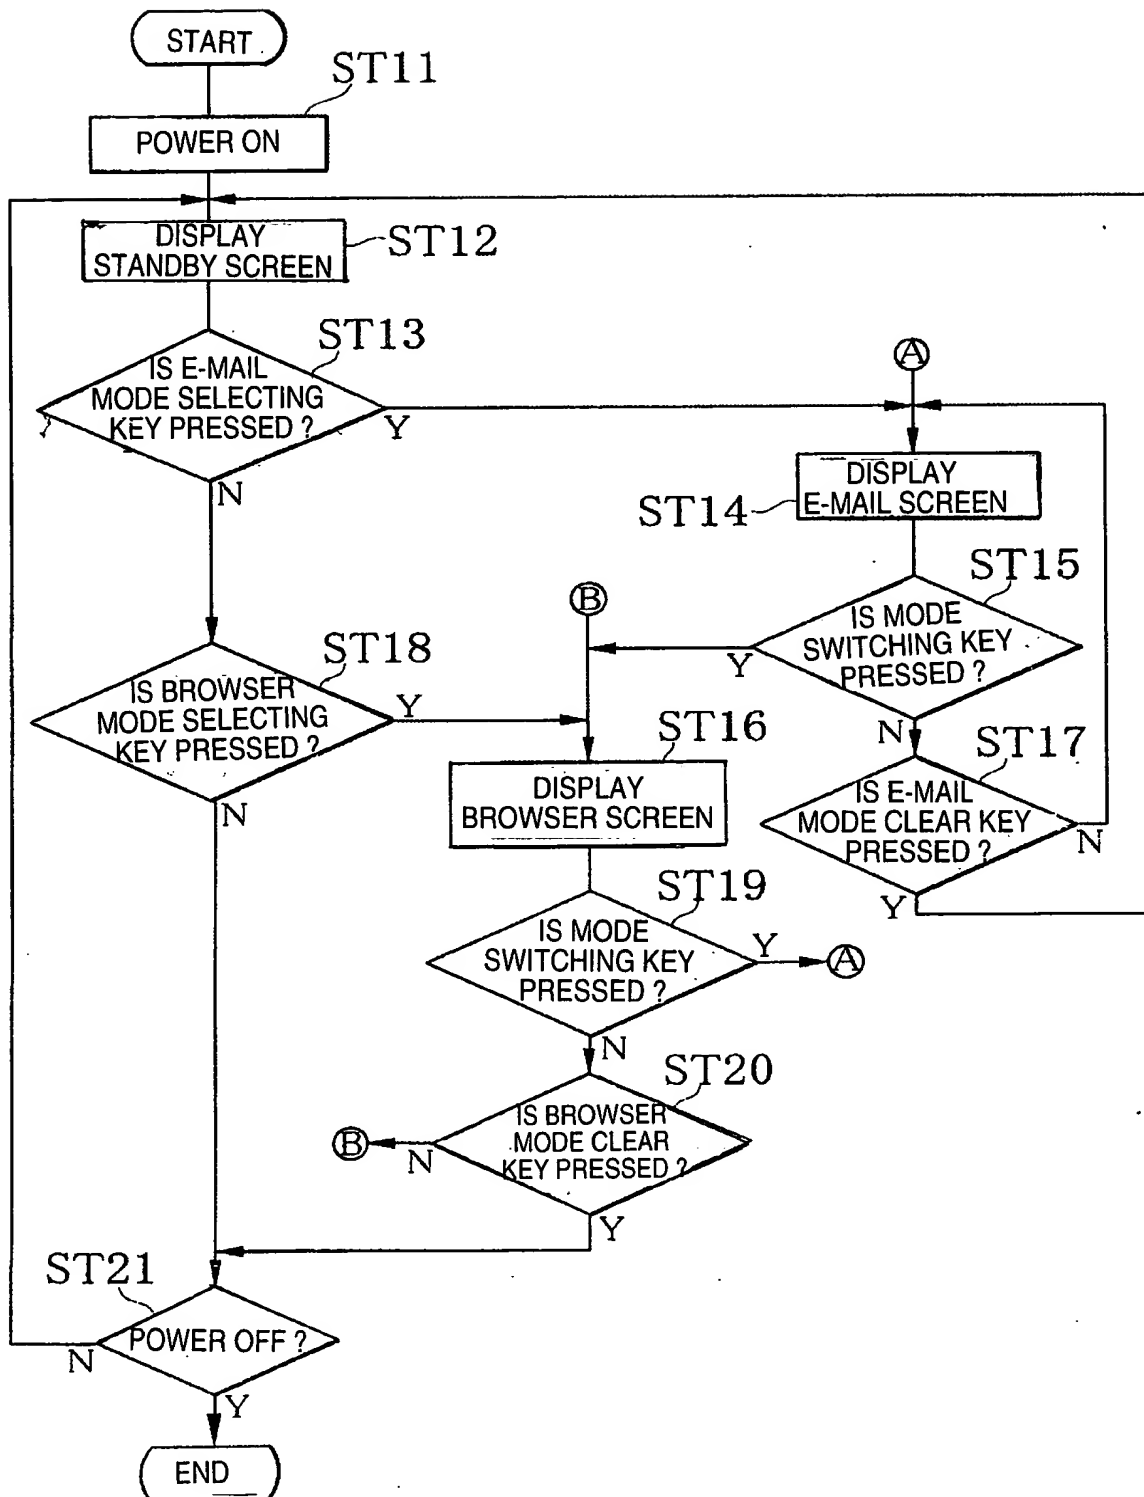
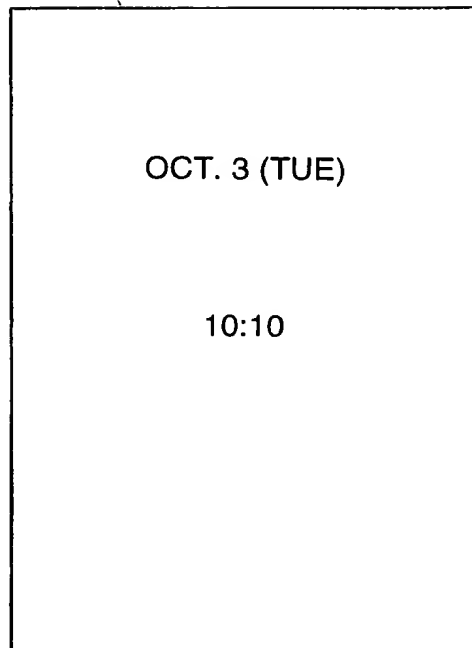


Fig. 3

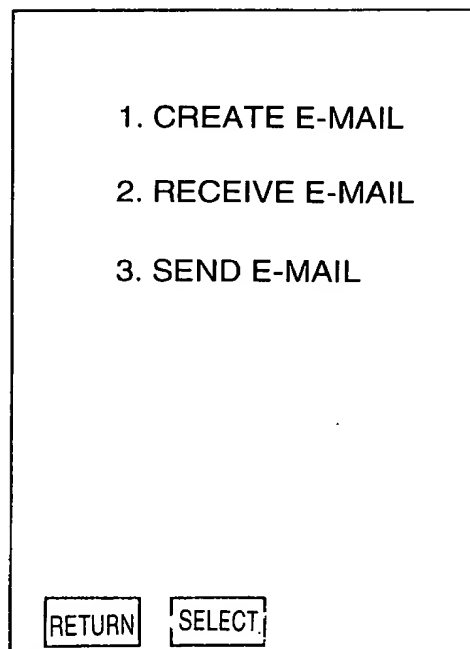


**Fig. 4**



7

**Fig. 5**



7

**Fig. 6**

1. INTERNET

2. BOOK MARK

3. MENU LIST

RETURN SELECT

Fig. 7

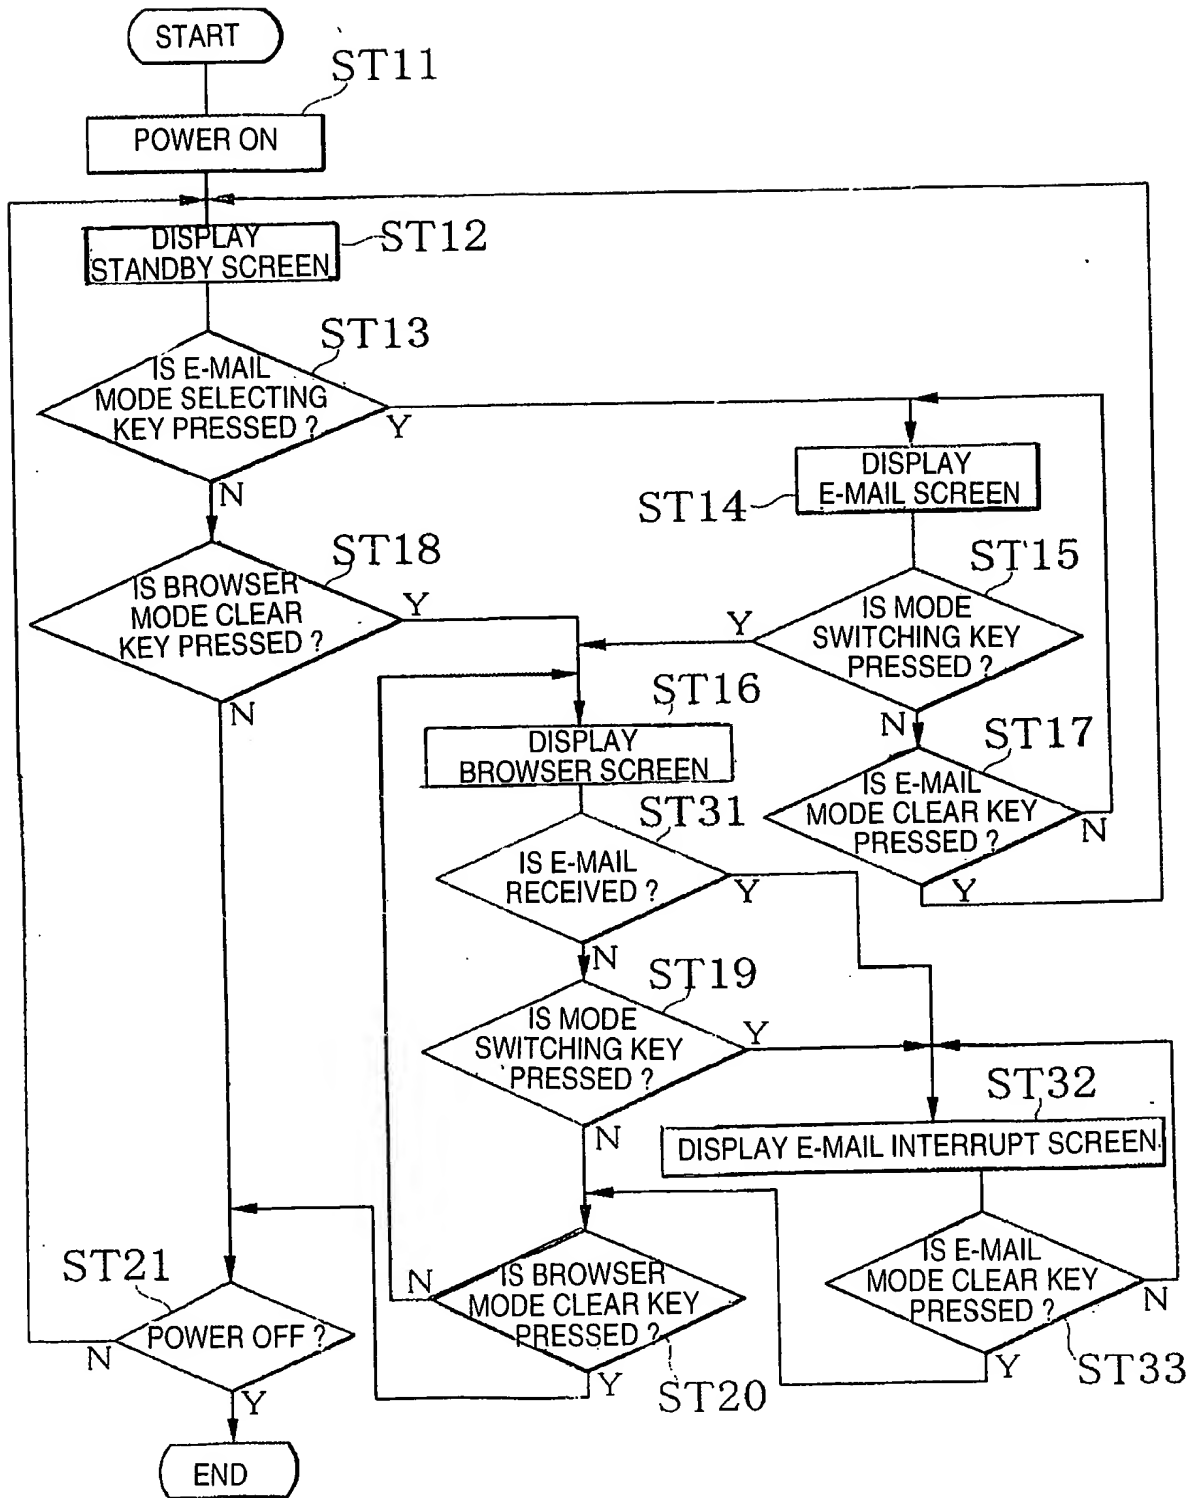


Fig. 8

7

1. ORDER CHECK  
PUBLISHER : A CORPORATION  
TITLE : CREATE HOMEPAGE

2. E-MAIL RECEIVED  
NOT READ E-MAIL : 1

RETURN SELECT

Fig. 9

7

ABC RESTAURANT

LOCATION : SUBWAY D LINE  
E STATION , F EXIT  
10 MIN'WALK

TEL : 03-XXXX-XXXX

OPEN : 10:00A.M.-10:00P.M.

RETURN SELECT COPY

72

71

**Fig. 10**

7

INFORMATION ON  
OPENING PARTY OF ALUMNI  
ASSOCIATION  
DATE : OCT. 20  
8:00 P.M.  
PLACE : ABC RESTAURANT

TEL : 03-XXXX-XXXX

RETURN SELECT COPY

72

71



Fig. 11

7

1. ORDER CHECK	
PUBLISHER : A CORPORATION	
TITLE : CREATE HOMEPAGE	
PRICE : ¥1,200	
AMOUNT : 1	
E-MAIL RECEIVED	
NOT READ E-MAIL : 1	
<input type="button" value="RETURN"/>	<input type="button" value="SELECT"/>

Fig. 12

7

1. ORDER CHECK	
PUBLISHER	E-MAIL RECEIVED
TITLE	
PRICE	
AMOUNT	NOT READ
	E-MAIL : 1
2. SHIPPED	
BUYER	
ADDRESS	
E-MAIL	
	<input type="button" value="RETURN"/>
	<input type="button" value="SELECT"/>

Fig. 13

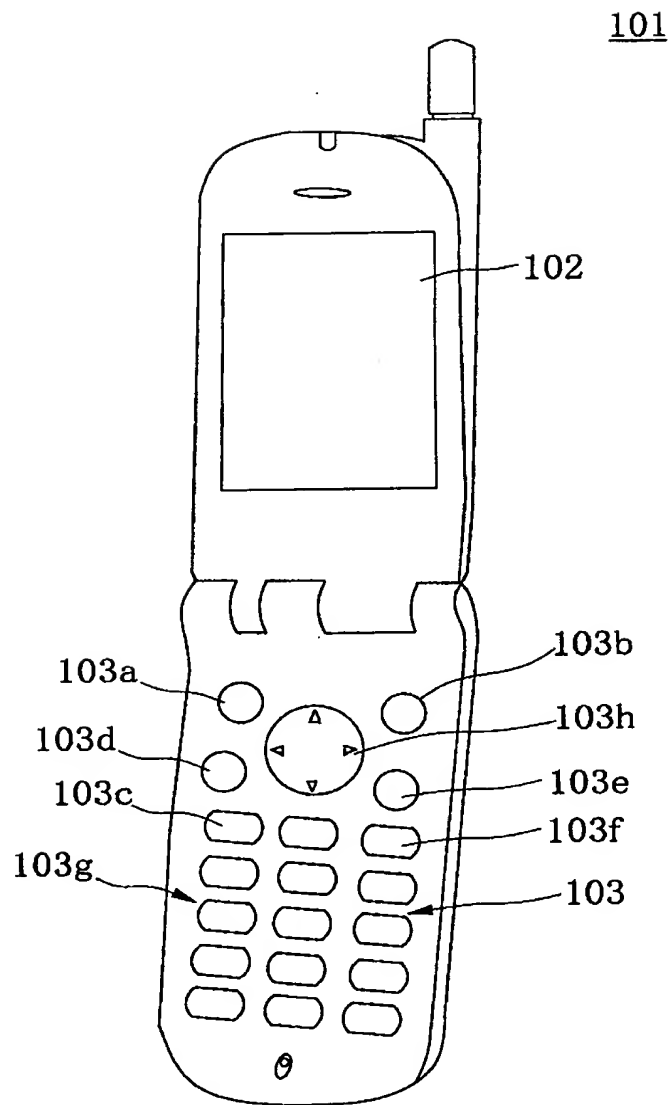


Fig. 14

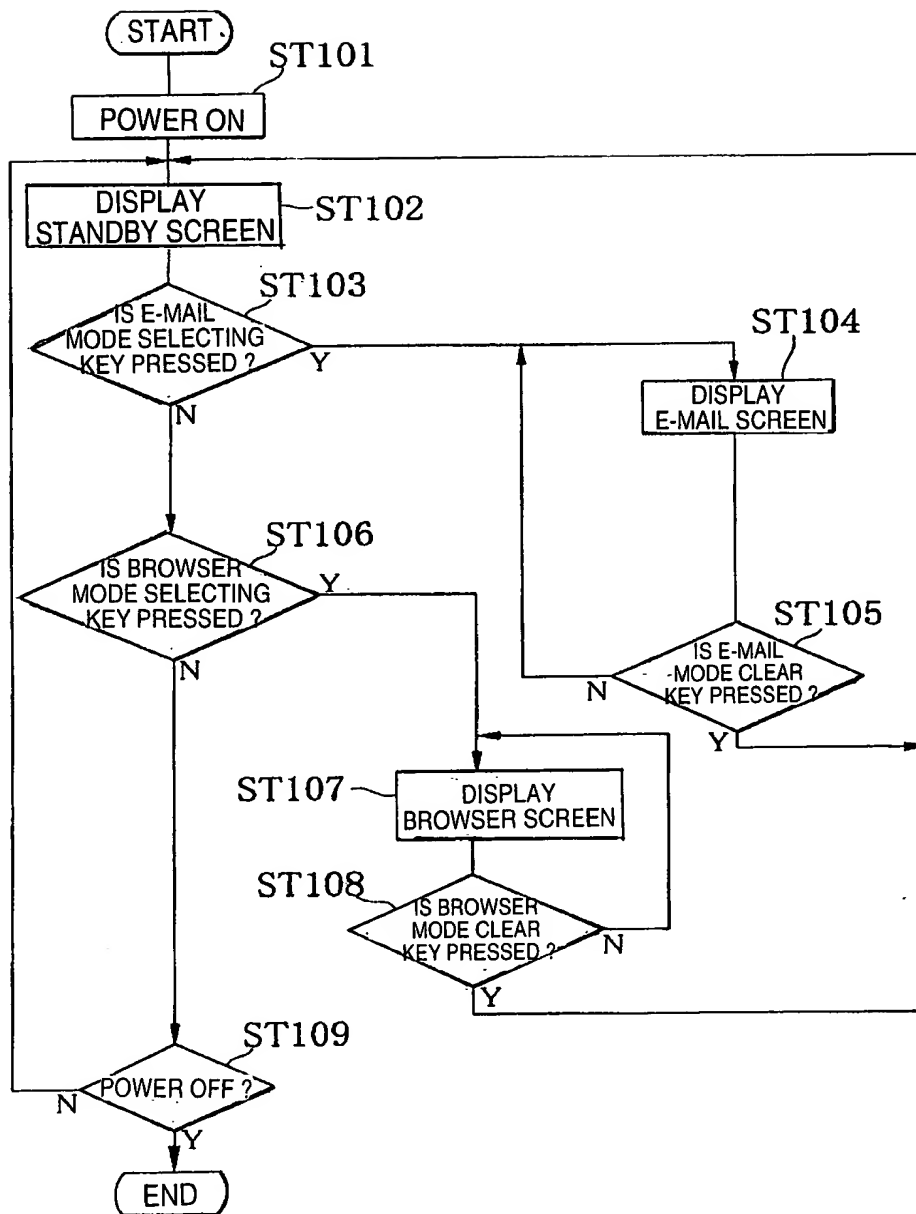


Fig. 15

(a)

1. CREATE  
E-MAIL

2. RECEIVE  
E-MAIL

3. SEND  
E-MAIL

RETURNSELECT

(b)

CREATE E-MAIL

ADDRESSED:

TITLE

RETURNSELECT

(c)

INFORMATION ON  
ALUMNI ASSOCIATION

DATE: OCT.1  
5:00 P.M.

PLACE: B RESTAURANT

CHARGE: ¥5,000

RETURNSELECT

Fig. 16

(a)

1. INTERNET

2. MENU LIST

3. BOOK MARK

RETURNSELECT

(b)

URL:

http://abcd.co.jp

RETURNSELECT

(c)

B RESTAURANT

PLACE : MITA MINATO-KU  
TOKYO -TO

OPEN :10:00 A.M.-  
9:00 P.M.

TEL:03-XXXX-XXXX

RETURNSELECT